


## Druckbegrenzungsventil - Einsatz - max. 20l

TYPE  
**VMPC**

HYDRAULIC DIAGRAM

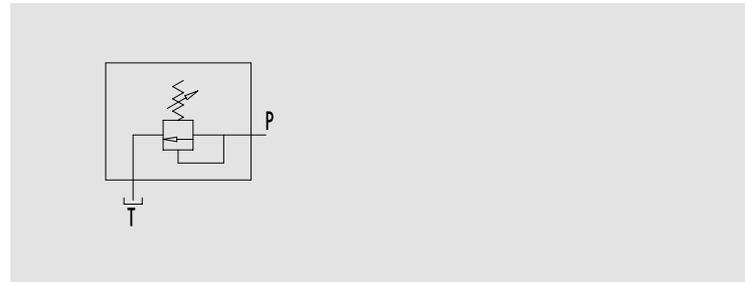

## 20 CARTRIDGE RELIEF VALVE

### USE AND OPERATION:


The relief valve provides overload protection in a fast and accurate way: when it reaches pressure setting, the valve open allowing pressure relief in order not to exceed this setting.

### MATERIALS AND FEATURES:

Body: zinc-plated steel.  
Internal parts: hardened and ground steel  
Seals: BUNA N standard  
Poppet type: minor leakage


### APPLICATIONS:

Fit the valve in the cavity.

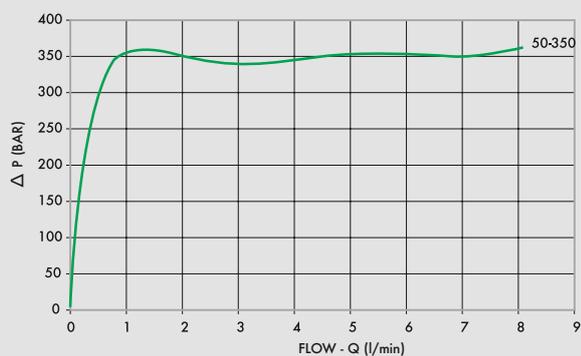

CODE	TYPE	MAX FLOW Lt. / min	PRESSURE RANGE Bar
<b>VC0200/350</b>	VMPC 20 50-350 BAR	20	50 - 350

4

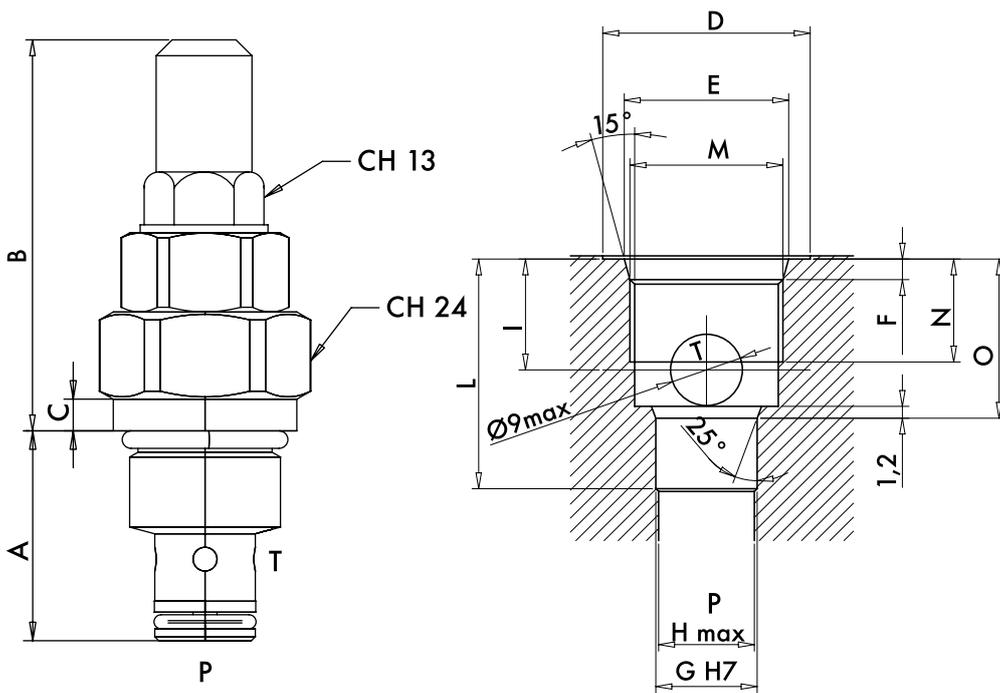

CODE	TYPE	M SAE	A mm	B mm	C mm	ØD mm	ØE mm	F mm	ØG mm	ØH mm	I mm	L mm	N mm	O mm	WEIGHT kg
<b>VC0200/350</b>	VMPC 20 50-350 BAR	3/4"-16	25,4	49,5	4	26	20,6	2,6	12,7	12	14	29	13	20,5	0,110

**ADJUSTEMENT**

CODE/V	• Handknob
CODE/PP	• Arranged for sealing cap
CODE/PP	• Sealing cap