


## Druckbegrenzungsventil - Einsatz - max. 35l

TYPE  
**VMPC**



HYDRAULIC DIAGRAM



## 35 CARTRIDGE RELIEF VALVE

### USE AND OPERATION:


The relief valve provides overload protection in a fast and accurate way: when it reaches pressure setting, the valve open allowing pressure relief in order not to exceed this setting.

### MATERIALS AND FEATURES:

Body: zinc-plated steel.  
Internal parts: hardened and ground steel  
Seals: BUNA N standard  
Poppet type: minor leakage


### APPLICATIONS:

Fit the valve in the cavity.

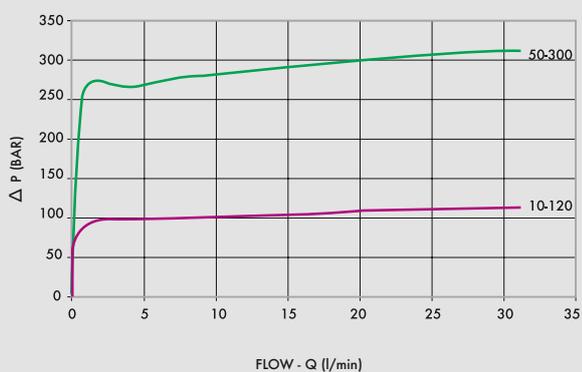

CODE	TYPE	MAX FLOW Lt. / min	PRESSURE RANGE Bar
<b>VC0350/120</b>	VMPC 35 10-120 BAR	35	10-120
<b>VC0350/300</b>	VMPC 35 50-300 BAR	35	50-300

4

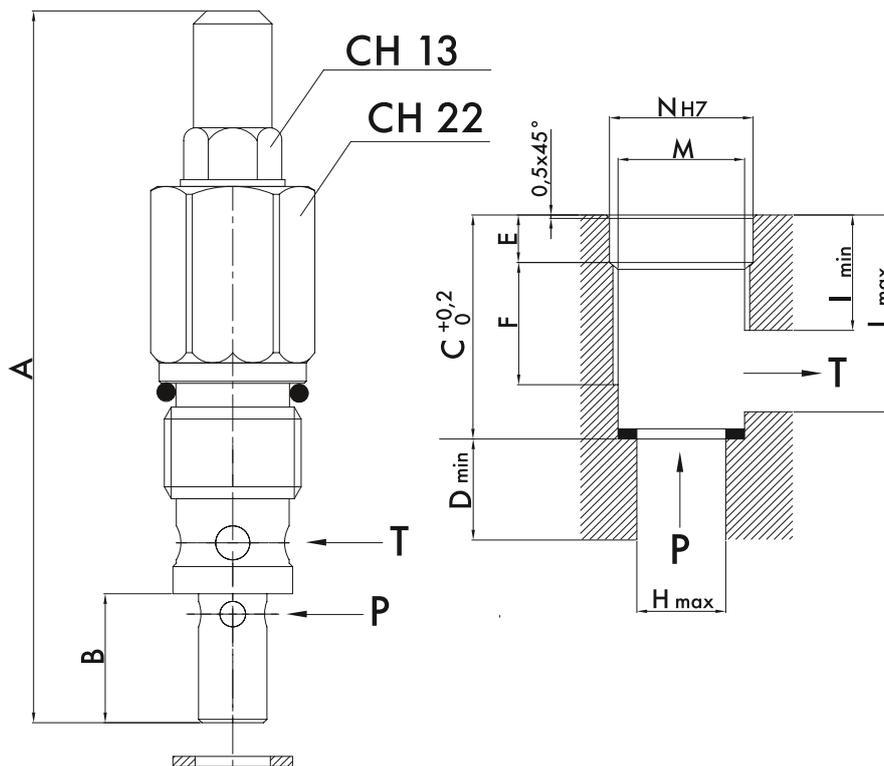

CODE	TYPE	M MET	A mm	B mm	C mm	D mm	E mm	F mm	ØH mm	I mm	L mm	ØN mm	WEIGHT kg
<b>VC0350/120</b>	VMPC 35 10-120 BAR	M20X1,5	104	19	34,5	21	7	16	13	18	29	21	0,155
<b>VC0350/300</b>	VMPC 35 50-300 BAR	M20X1,5	104	19	34,5	21	7	16	13	18	29	21	0,155

**ADJUSTEMENT**

CODE/V	• Handknob
CODE/PP	• Arranged for sealing cap
CODE/PP	• Sealing cap