


Druckbegrenzungsventil - Einsatz - max. 80l

TYPE
VMPC

HYDRAULIC DIAGRAM

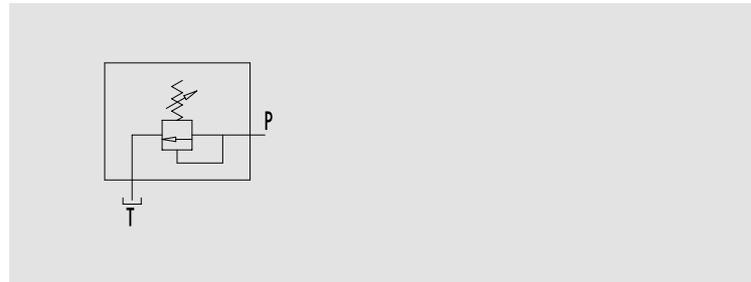

80 CARTRIDGE RELIEF VALVE

USE AND OPERATION:


The relief valve provides overload protection in a fast and accurate way: when it reaches pressure setting, the valve open allowing pressure relief in order not to exceed this setting.

MATERIALS AND FEATURES:

Body: zinc-plated steel.
Internal parts: hardened and ground steel
Seals: BUNA N standard
Poppet type: minor leakage


APPLICATIONS:

Fit the valve in the cavity.

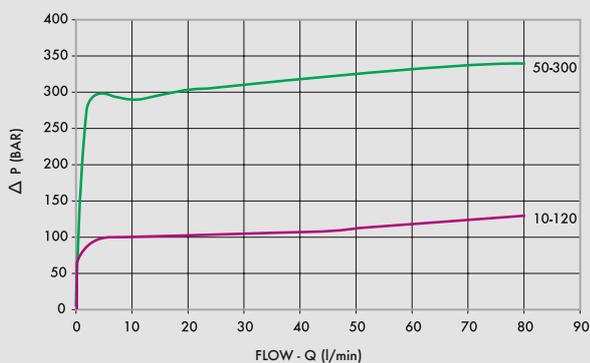

CODE	TYPE	MAX FLOW Lt. / min	PRESSURE RANGE Bar
VC0800/120	VMPC 80 10-120 BAR	80	10-120
VC0800/300	VMPC 80 50-300 BAR	80	50-300

4

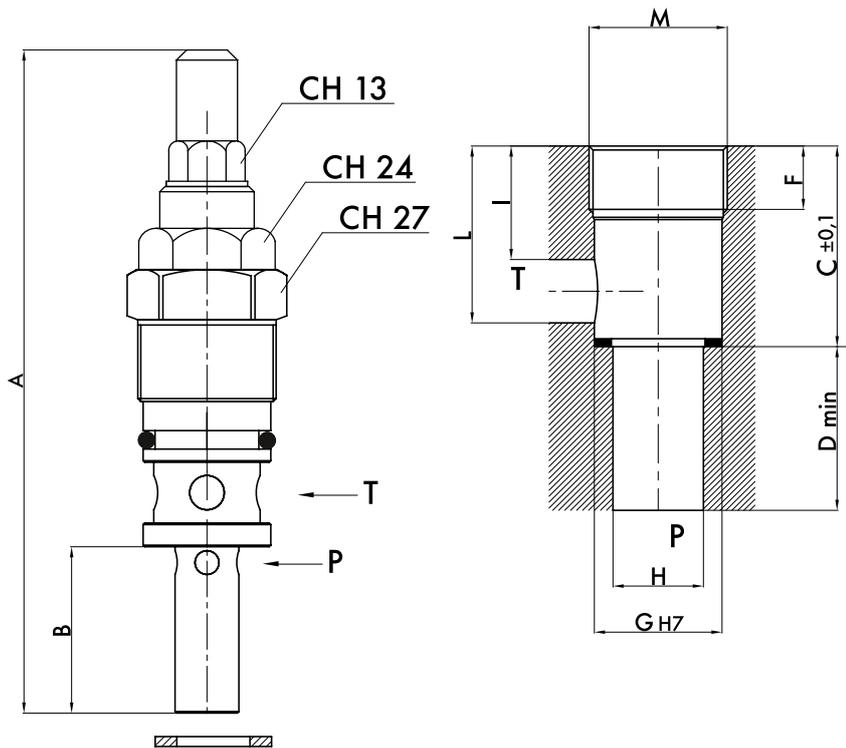

CODE	TYPE	M MET	A mm	B mm	C mm	D mm	F mm	ØG mm	ØH mm	I mm	L mm	WEIGHT kg
VC0350/120	VMPC 80 10-120 BAR	M26X1,5	134	31,5	39	33	13,5	24	17	22	34	0,240
VC0350/300	VMPC 80 50-300 BAR	M26X1,5	134	31,5	39	33	13,5	24	17	22	34	0,240

ADJUSTEMENT

CODE/V	• Handknob
CODE/PP	• Arranged for sealing cap
CODE/PP	• Sealing cap