


## Schockventil mit aufschaltbaren Rückschlagventilen

TYPE  
**VBAU**



HYDRAULIC DIAGRAM



### DUAL CROSS RELIEF VALVE WITH PILOT CHECK VALVE

**USE AND OPERATION:**

Made up by 1 double pilot check valve together with one double cross relief valve, this valve enables to block the actuator in one position and to limit inlet pressure to the actuator.

**MATERIALS AND FEATURES:**

Body: zinc-plated steel.  
Internal parts: hardened and ground steel.  
Seals: BUNA N standard  
Poppet type: minor leakage

**APPLICATIONS:**


Connect V1 and V2 to the pressure flow and C1 and C2 to the actuator.

**ON REQUEST**

- other setting available (CODE/T000 please specify the desired setting)

PRESSURE DROPS CURVE

Oil temperature: 50° C - Oil viscosity: 30 cSt

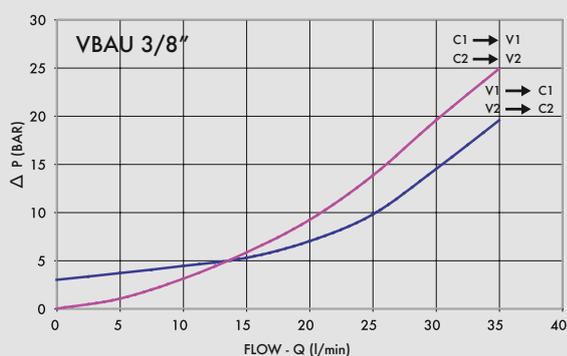

CODE


TYPE

MAX FLOW  
Lt. / min

**V0444**

VBAU 3/8"

35

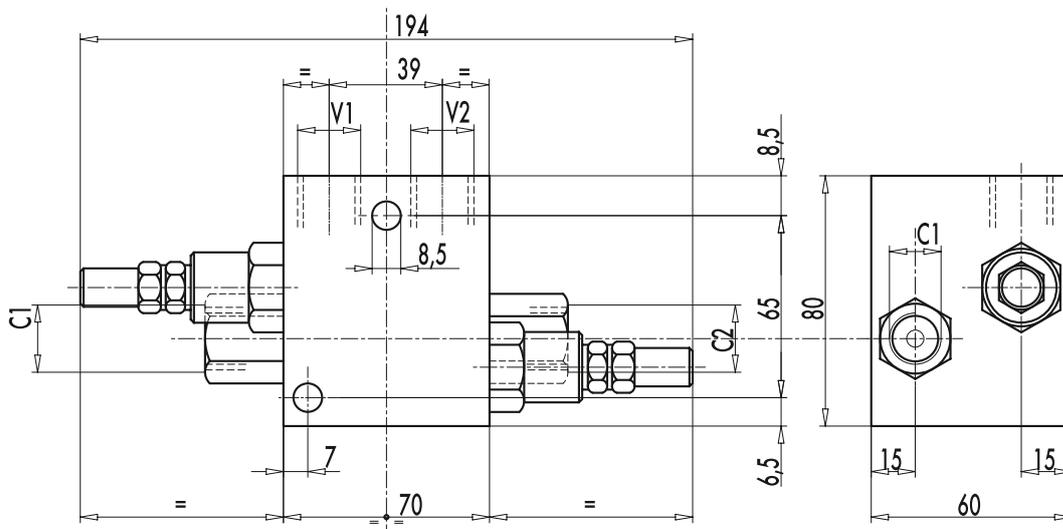

5

CODE

TYPE

GAS

WEIGHT

Kg

**V0444**

VBAU 3/8"

G 3/8"

2,534

**SPRINGS**

Setting range (bar)	Pressure increase (bar/turn) Q= 4l/min	Standard setting (bar)
10-180	40	100

**ADJUSTEMENT**

CODE/V	• Handknob
CODE/PP	• Arranged for sealing cap
CODE/PP	• Sealing cap