


Wechselventil

TYPE
VU2P



HYDRAULIC DIAGRAM

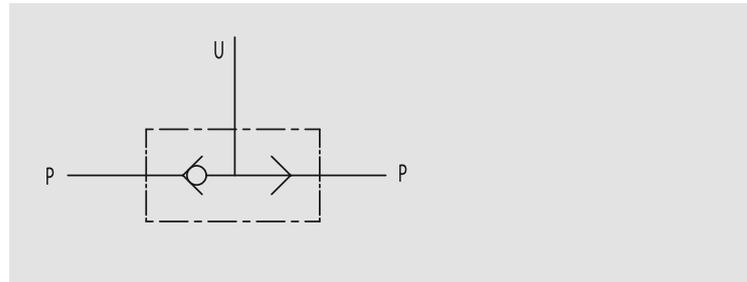

SHUTTLE VALVES

USE AND OPERATION:

This valve is used to select higher pressure between two pressure lines.

MATERIALS AND FEATURES:




Body: zinc-plated steel
Seal: BUNA N standard
Tightness: ball type

APPLICATIONS:


Connect ports P to the 2 lines to select and U to the line to feed .

PRESSURE DROPS CURVE

Oil temperature: 50° C - Oil viscosity: 30 cSt

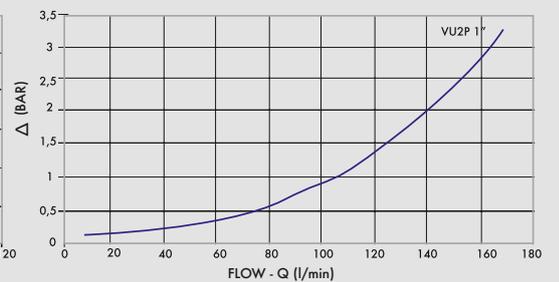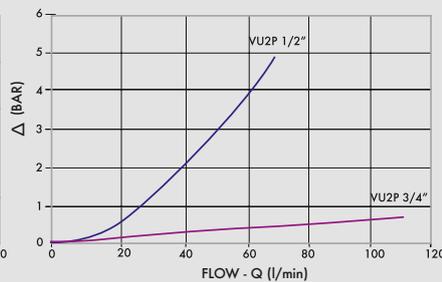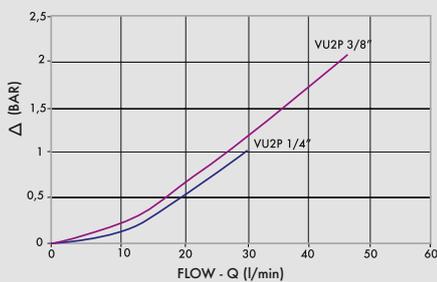

CODE	TYPE	MAX FLOW Lt. / min	MAX PRESSURE Bar
V0666	VU2P 1/4"	30	450
V0668	VU2P 3/8"	45	450
V0670	VU2P 1/2"	70	450
V0680	VU2P 3/4"	110	350
V0685	VU2P 1"	150	300

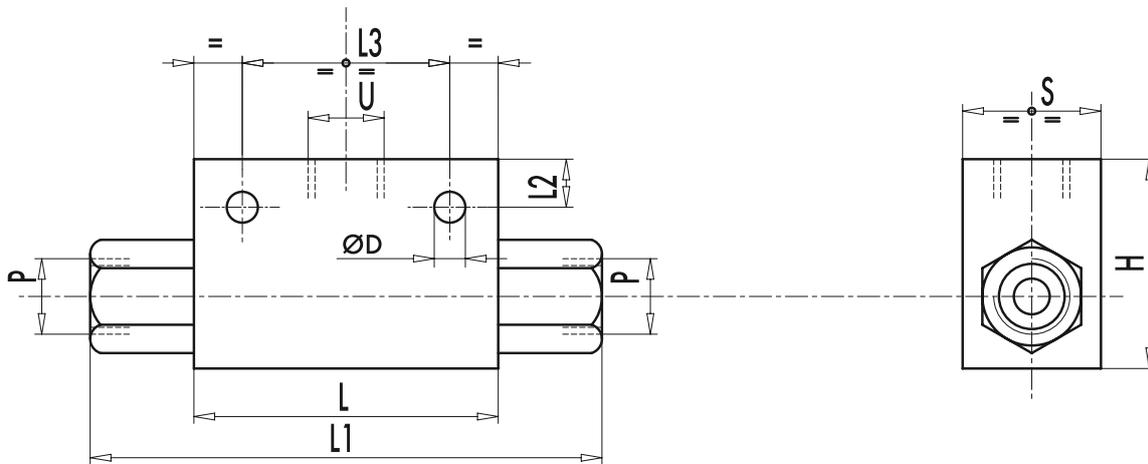

CODE	TYPE	U - P GAS	L mm	L1 mm	L2 mm	L3 mm	H mm	S mm	ØD mm	WEIGHT kg
V0666	VU2P 1/4"	G1/4"	60	104	9	44	40	30	8,5	0,560
V0668	VU2P 3/8"	G3/8"	60	104	9	44	40	30	8,5	0,530
V0670	VU2P 1/2"	G1/2"	60	104	12	44	50	30	8,5	0,652
V0680	VU2P 3/4"	G3/4"	80	127	12	44	58	35	8,5	1,086
V0685	VU2P 1"	G1"	80	126	11	60	80	50	10,5	1,870